



BX-600-LTS

COMBINATION LID AND TAPE CLOSER

STANDARD TECHNICAL SPECIFICATIONS



- ◆ Speed: upto 10 Boxes per minute (dependent on box height)
- ◆ Box Footprint: Single footprint ladder / multi footprint tape closer
- ◆ Closure: Glue/Lid and tape close
- ◆ Min Footprint Size: 320mm x 250mm
- ◆ Max Footprint Size: 750mm x 500mm
- ◆ Typical Max Cut Length: N/A closer only
- ◆ Typical Infeed/Outfeed Height: 700mm
- ◆ Sample Power Consumption UK, EU, AU: 11Kw, 16A/Ph, 50Hz, 400V, 3 Phase, N & E
- ◆ Sample Power Consumption USA: 11Kw, 16A/Ph, 60Hz, 208V, 3 Phase, N & E
- ◆ Air Consumption: Average 7.22 cfm @ 80-100 psi
- ◆ Net Weight: 1000Kg
- ◆ Specific Components: Rockwell control system
- ◆ Machine floorplan drawing ref LS-26658
- ◆ Touchscreen operator interface with management information and remote diagnostics
- ◆ Emergency stops and safety circuitry, fully CE marked
- ◆ Mild steel powder coated main frame
- ◆ Low maintenance servo drives used for precision motion control and remote diagnosis

BOX SPECIFICATION

- ◆ Box Styles: RSC/HSC or FEFCO 0200/0201/0300/0301.
- ◆ Materials: B, C and E fluted corrugate of various grades typical, but not limited


OPTIONS

- ◆ A range of options are available

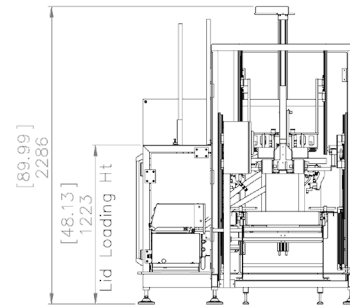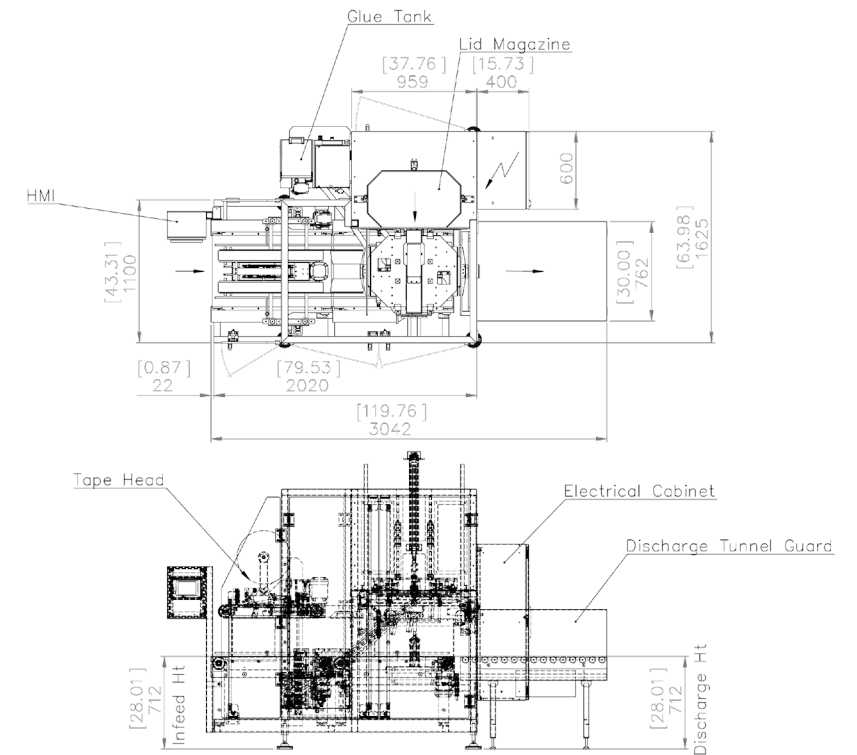


TYPICAL BOX INFEEED / OUTFEED WITH LID AND TAPE CLOSURE

TYPICAL 0201 BOXES IN RANDOM SIZES

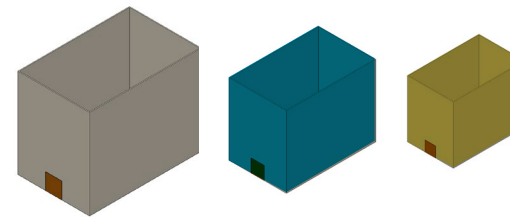

TYPICAL LARGE BOXES OUT - REDUCED VOLUME CUT/CRIMP/FOLD/GLUE/LID

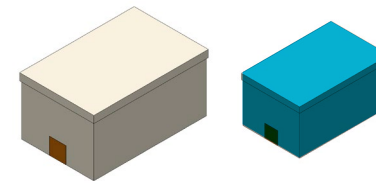

TYPICAL SMALLER BOX OUT - REDUCED VOLUME CUT/CRIMP/FOLD/GLUE/TAPE

