




# SR750 SHRINK WRAPPER

## SR750 STANDARD TECHNICAL SPECIFICATIONS

- ◆ Speed: Up to 50/min
- ◆ Concept: High speed single roll shrinkwrapper
- ◆ Max Film Width: 700mm
- ◆ Feed: Inline
- ◆ Typical Outfeed Height: 900mm
- ◆ Sample Power Consumption: 35Kw, 70A/Ph, 440V, 3 Phase, N & E
- ◆ Sample Air Supply: Up to 10.6 cfm @ 80 psi (6 bar)
- ◆ Typical Net Weight: 2500Kg
- ◆ Specific Components: Rockwell Controls, SMC Pneumatics
- ◆ Colour: RAL 7035 Grey

## PRODUCT HANDLING

- ◆ Typical Product Styles: cartons, bags, bottles, aerosols and tubs to name but a few

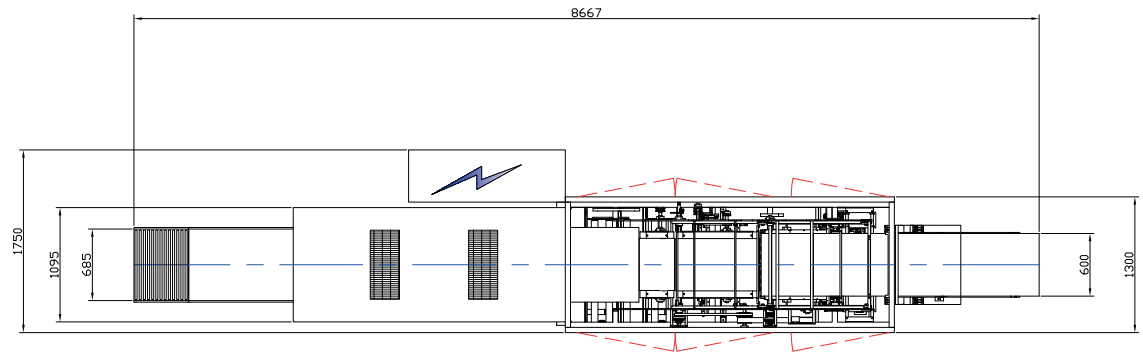

## OPTIONS

- ◆ Collators to suit unsupported products include, product dividers, scrolls, starwheels, tierers, gating systems, race tracks etc.
- ◆ Automatic film splice for continuous production flow
- ◆ Easy lace Automatic film splice with retractable film carriages
- ◆ Pack cooler after shrink tunnel
- ◆ Infeed and discharge conveyor systems of various mediums to suit product and floor space
- ◆ Stainless Steel construction
- ◆ Dairy specification construction
- ◆ Aerosal specification construction
- ◆ Inline feed.