

Shrink wrappers

SR750 | Shrink wrapper

Standard technical specifications

Speed: Up to 50/min

Concept: High speed single roll shrinkwrapper

Max film width: 700mm

Feed: Inline

Typical outfeed height: 900mm

Sample power consumption: 35Kw, 70A/Ph, 440V, 3 Phase, N&E

Sample air supply: Up to 10.6 cfm @ 80 psi (6 bar)

Typical net weight: 2500Kg

Specific components: Rockwell Controls, SMC Pneumatics

Colour: RAL 7035 grey

Product handling

Typical product styles: cartons, bags, bottles, aerosols and tubs to name but a few



Options

Collators to suit unsupported products include, product dividers, scrolls, starwheels, tierers, gating systems, race tracks etc.

Automatic film splice for continuous production flow

Easy lace Automatic film splice with retractable film carriages

Pack cooler after shrink tunnel


Infeed and discharge conveyor systems of various mediums to suit product and floor space

Stainless Steel construction

Dairy specification construction

Aerosol specification construction

Inline feed.

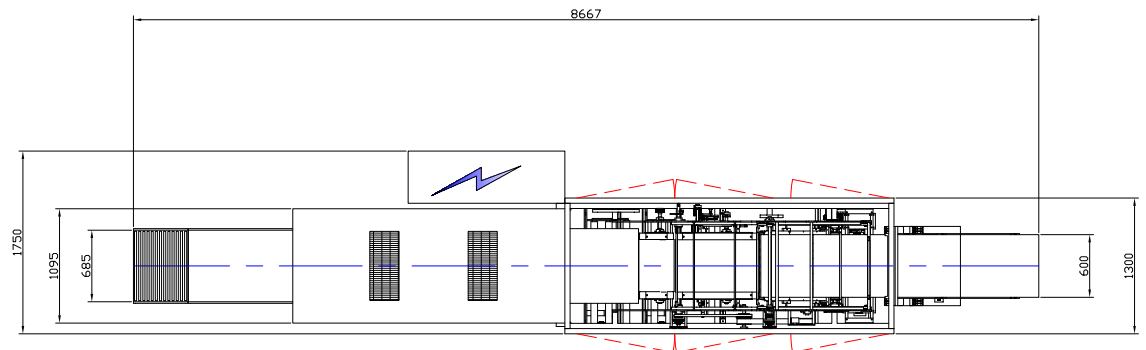

For more information, contact: WestRock Automated Packaging Systems
Phone: +44.0.1502.713777 • E-mail: aps.uk@westrock.com • www.linkxpackaging.com

