




GP-C1-PD-P1 GANTRY PALLETISER

GP2-C2-P1 STANDARD TECHNICAL SPECIFICATIONS

- ◆ Speed: Up to 10 movements/min
- ◆ Concept: Automatic
- ◆ Number of Pick Up Points: 1
- ◆ Number of Pallet Load Positions: 1
- ◆ Axis: 3 axis of precision servo motion
- ◆ Pallet sizes: Euro 800x1200mm, Chep 1000x1200mm
- ◆ Max loaded Pallet Height: 1800mm
- ◆ Product Infeed Height: 500mm to 1500mm
- ◆ Pallet Outfeed Height: Floor to 600mm
- ◆ Sample Power Consumption: 8Kw, 0.82A/Ph, 400V, 3 Phase, N & E
(Product and Gripper Dependant)
- ◆ Sample Air Supply: Up to 16.8 cfm @ 80 psi (6 bar)
- ◆ Typical Net Weight: 1000Kg
- ◆ Specific Components: Rockwell Controls, SMC Pneumatics
- ◆ Colour: RAL 9007 Grey

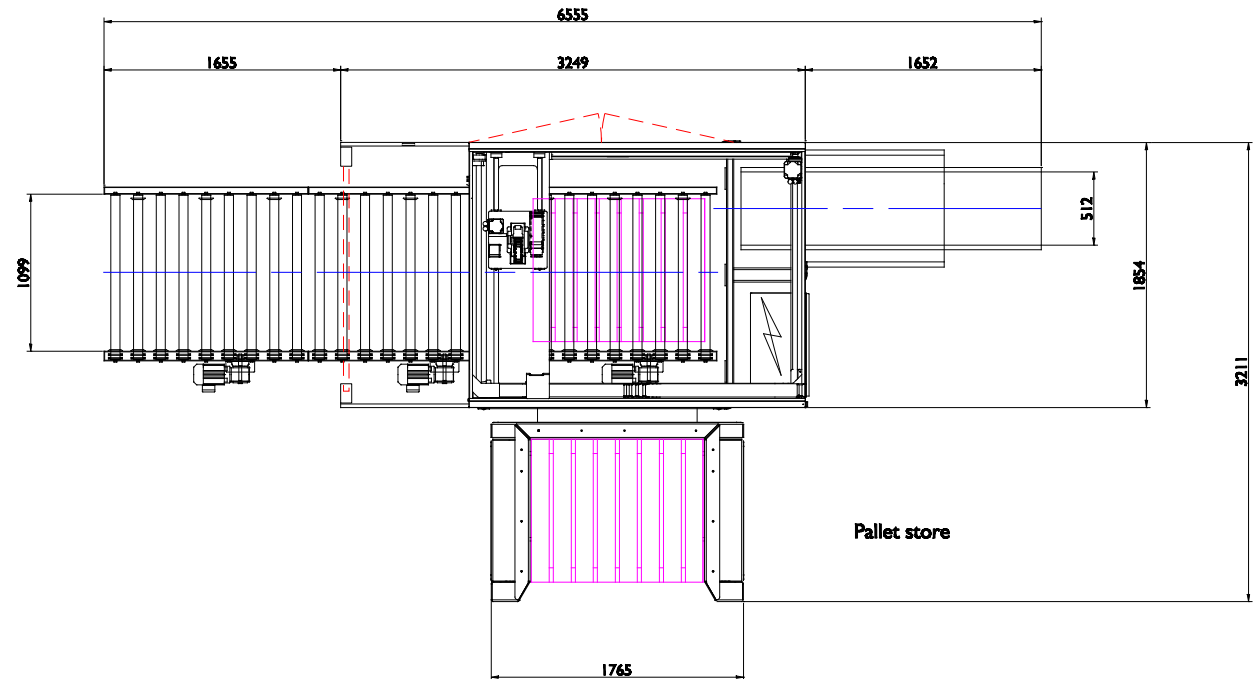

OPTIONS

- | | |
|----------------------------|-------------------------------------|
| ◆ Product infeed conveyors | ◆ Pallet store |
| ◆ Pallet conveyors | ◆ Low ceiling capability |
| ◆ Layer pad store | ◆ Gripper and end effector variants |

VACUUM GRIPPER



PADDLE GRIPPER

